

C5T

Integrated differential feeding high speed computerized overlock machine

Anti-split-layer、Fast response、 Strong heavy material feeding ability


- Easy for heavy material feeding and sewing
- Anti-split-layer for long piece sewing
- Super high speed and fast response
- Voice guide and remind, easy to use



JACK TECHNOLOGY CO.,LTD

ADD:No.1008, Donghai Avenue East, Jiao jiang District, Taizhou City,
Zhejiang Province, China
TEL:0086-576-88177782

E-mail: sales@chinajack.com
www.chinajack.com

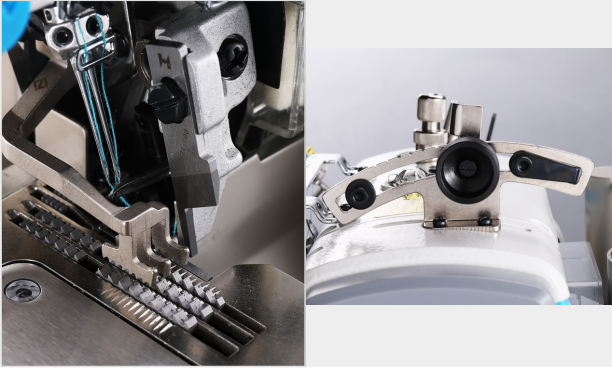


1 Top&bottom differential feeding, Anti-split-layer for long piece

Top&bottom differential feeding,solve problems such as misalignment and distortion of the upper and lower layers during sewing.



2 Strong feeding ability for heavy material, more smooth for sewing cross&ridge

750W large motor+new transmission structure, smooth and powerful for cross and ridge sewing, coral velvet : 4 layers regular sewing, 6 layers ridge sewing

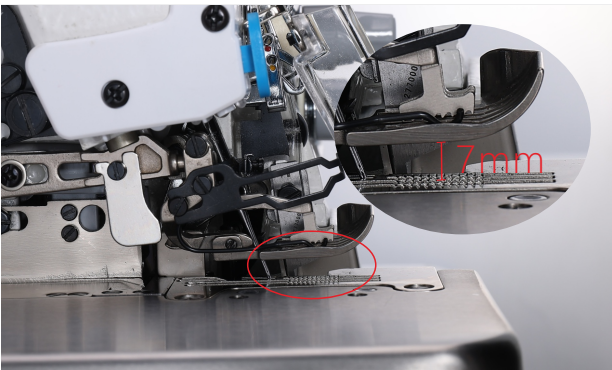

3 Higher presser foot height, Easy for feeding&sewing

Increase max presser foot height to 7mm, easy to place thick fabrics such as cotton clothes and down jackets, easy feeding&sewing



4 Voice guide, easy to operate and sewing

Easy to operate and solve common fault with voice guide,one key to switch Fully-auto, Semi-auto and Computerized mode

技术参数

机 型	用途	机针	针数	线数	针间距 (mm)	针迹宽度 (mm)	针迹长度 (mm)	差动比	压脚高度 (mm)	最高转速 (S.p.m)	体积 (mm)	重量 (kg)
C5T-4-M03/333	Plain seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	6000	505×360×565	29.2/39.8
C5T-4-M04/435	Extra heavy duty	DC×27 14#	2	4	2	4	7	0.8-1.5	7	6000	505×360×565	29.2/39.8
C5T-5-03/233	5×5	DC×27 14#	2	5	5	5	3.8	0.7-2	5	6000	505×360×565	29.2/39.8
C5T-5-03/333	3×4	DC×27 14#	2	5	3	4	3.8	0.7-2	5	6000	505×360×565	29.2/39.8
C5T-5-03/333/H	3×4	DC×27 14#	2	5	3	4	3.8	0.7-2	5	6000	505×360×565	29.2/39.8
C5T-5-A04/435	Jeans exclusive	DC×27 19#	2	5	5	6	5	0.8-1.5	7	6000	505×360×565	29.2/39.8